

# NU 150

EASY

**Scotsman**  
Ice Systems

## Self Contained Ice Machine up to 85 kg

|           |
|-----------|
| Item #:   |
| Project:  |
| Quantity: |



### FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.



NU 150  
Dice 10 g  
W 22 x D 22 x H 22 mm



NU H 150  
Half Dice 6 g  
W 10 x D 22 x H 28 mm



NU L 150  
Large Dice 15 g  
W 28 x D 22 x H 28 mm

### CONDENSING SYSTEM

Air cooled  
Water cooled

### INTERNAL BIN CAPACITY

20 kg

### REFRIGERANT GAS

R404A

### OPERATING REQUIREMENTS

|                    | Minimum           | Maximum           |
|--------------------|-------------------|-------------------|
| Air temperature    | 10°C              | 43°C              |
| Water temperature  | 5°C               | 38°C              |
| Water pressure     | 1 bar<br>(14 psi) | 5 bar<br>(70 psi) |
| Electrical voltage | -10%              | +10%              |

### VOLTAGE V/Hz/ph

230/50/1

Certifications:



**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Self Contained Ice Machine up to 85 kg


# NU 150



## Self Contained Ice Machine up to 85 kg

|           |
|-----------|
| Item #:   |
| Project:  |
| Quantity: |

Self Contained Ice Machine up to 85 kg

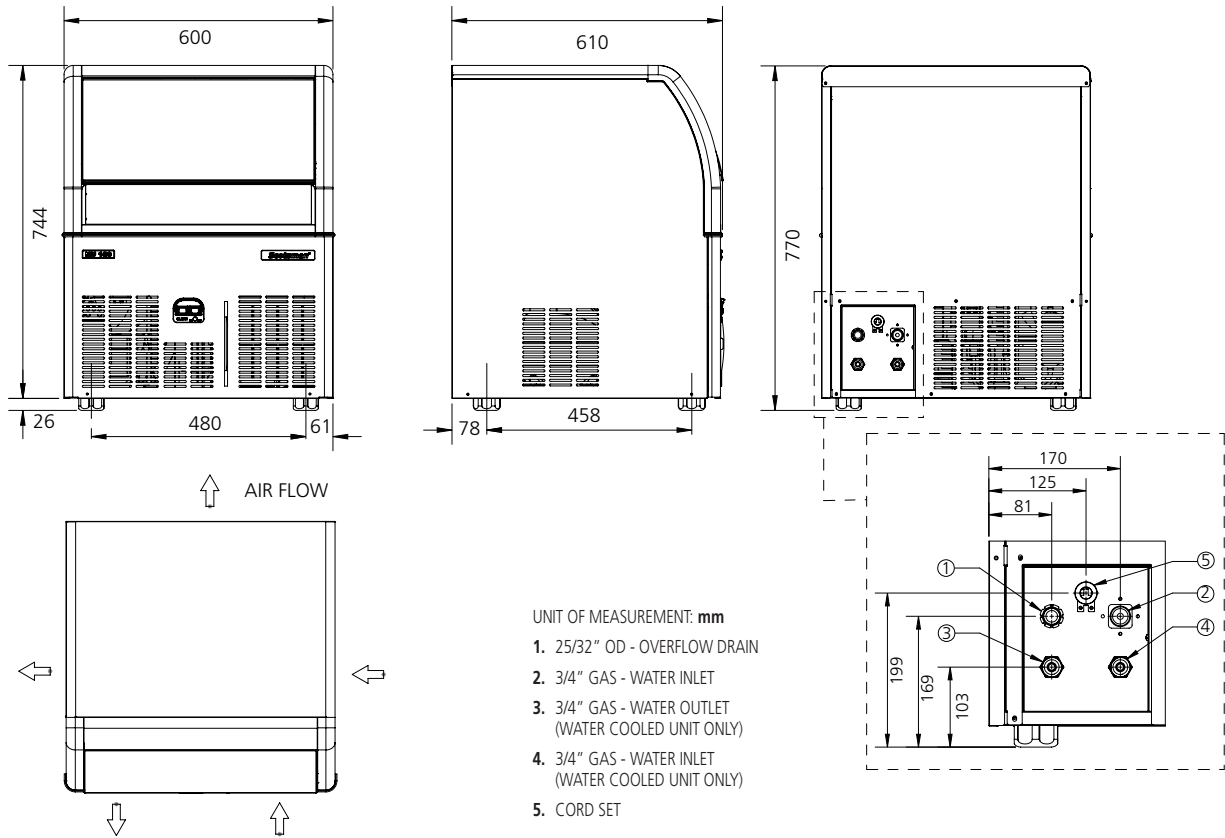

| UNIT DATA          |                    | Compressor  |          | Circuit wires |     | Max. fuse size |                  |    |
|--------------------|--------------------|-------------|----------|---------------|-----|----------------|------------------|----|
|                    |                    | Version     | Voltage  | Btu/h         | W   | No.            | Ømm <sup>2</sup> | A  |
| Size (W x D x H)   | 600 x 610 x 770 mm | NU 150 AS   | 230/50/1 | 3378          | 990 | 3              | 1.5              | 10 |
| Net weight         | 50 kg              | NU H 150 AS | 230/50/1 | 3378          | 990 | 3              | 1.5              | 10 |
| SHIPPING DATA      |                    | NU L 150 AS | 230/50/1 | 3378          | 990 | 3              | 1.5              | 10 |
|                    |                    | NU 150 WS   | 230/50/1 | 3378          | 990 | 3              | 1.5              | 10 |
|                    |                    | NU H 150 WS | 230/50/1 | 3378          | 990 | 3              | 1.5              | 10 |
|                    |                    | NU L 150 WS | 230/50/1 | 3378          | 990 | 3              | 1.5              | 10 |
| Carton (W x D x H) | 670 x 680 x 920 mm |             |          |               |     |                |                  |    |
| Weight             | 62 kg              |             |          |               |     |                |                  |    |

| Version     | Condensation | Voltage  | 24 h ice production kg<br>°C Amb. / °C Water |           |           | Energy consumption* |         | Water usage* | Instant power |
|-------------|--------------|----------|--|-----------|-----------|---------------------|---------|--------------|---------------|
|             |              |          | 10°C/10°C                                    | 21°C/10°C | 32°C/21°C | kWh/100 kg          | kWh/24h | l/h          | W             |
| NU 150 AS   | Air          | 230/50/1 | 85   | 68        | 48        | 18.7                | 9.0     | 3.3          | 500           |
| NU H 150 AS | Air          | 230/50/1 | 85   | 70        | 50        | 19.4                | 9.7     | 3.4          | 500           |
| NU L 150 AS | Air          | 230/50/1 | 80   | 70        | 50        | 19.4                | 9.7     | 3.4          | 500           |
| NU 150 WS   | Water        | 230/50/1 | 85   | 80        | 70        | 10.8                | 7.6     | 52.7         | 500           |
| NU H 150 WS | Water        | 230/50/1 | 85   | 70        | 70        | 10.8                | 7.6     | 52.7         | 500           |
| NU L 150 WS | Water        | 230/50/1 | 80   | 70        | 65        | 10.8                | 7.0     | 48.9         | 500           |

(\* Data refer to 32°C Amb. / 21°C Water temperature conditions)